

high-tech line

MULTI 800 - 1300 - 2500 - 4000 - 5800

**: multifunction pump
for water recirculation**



multi > Pompa multifunzione per il ricircolo dell'acqua



ENG From the 800 lt/h model to the powerful 5800 lt/h model, the Multi line comprises five recirculating pumps for every type of pond up to 10,000 litres. Built according to the strictest international safety regulations, they operate in Wet & Dry mode (except the 800 model), are easy to maintain and are surprising for their high performance and reliability. The 2500-4000-5800 models of the Multi line may be combined with the Eco Max internal filter for ponds or associated with a sponge pre-chamber in order to create waterfalls and pleasant water effects in the pond.

I Dal modello 800 al potente modello 5800 la linea Multi comprende cinque pompe da ricircolo per ogni tipo di acquario, fontana o laghetto. Costruite secondo le più severe norme internazionali di sicurezza, funzionano in modalità Wet & Dry (escluso mod. 800), sono di facile manutenzione e sorprendono per le elevate prestazioni ed affidabilità. I modelli 2500-4000-5800 possono essere abbinati al filtro interno per laghetti Eco Max o associati ad una precamera spugna per creare cascate e suggestivi giochi d'acqua all'interno di un laghetto.



NRG SYSTEM SICCE

The NRG system is a revolution in the sector of permanent magnet synchronous motors and allows you to obtain exceptional power, reduced consumption, great reliability and very low noise levels.

Il sistema NRG è una rivoluzione nel settore dei motori sincroni a magnete permanente e consente di ottenere potenze eccezionali, ridotti consumi, grande affidabilità ed i più bassi livelli di rumorosità.



WET AND DRY APPLICATION

The WET & DRY application permits the models of the MULTI (except the smallest mod. 800) to be utilized whether they are completely submersed or outside of the water. When operating out of the water, the pump does not overheat as a result of the research during the designing of the surfaces and materials. The static seals do not present any problems of water loss and in the case of impeller blockage or malfunction, a reversible thermal protector stops the flow of current to the motor, preventing any possible damage of the pump.

L'applicazione WET & DRY permette di impiegare i modelli della linea multi (eccetto il più piccolo mod. 800) sia completamente immersa sia fuori dall'acqua. Fuori dall'acqua la pompa non si surriscalda grazie allo studio in fase di progettazione delle superfici e dei materiali. Grazie alle tenute statiche la pompa non presenta nessun problema di perdita d'acqua e nel caso di guasto o malfunzionamento un protettore termico reversibile interrompe l'alimentazione, impedendo qualsiasi danneggiamento della pompa.



AIR MIX SYSTEM

The pre-chamber accessory with Air Mix system available for 2500, 4000, 5800 models (optional) allows large quantities of air to be mixed with the water, considerably increasing the concentration of Oxygen (O₂).

L'accessorio precamera con sistema Air Mix disponibile per i modelli 2500, 4000, 5800 (optional) consente di miscelare grandi quantità di aria con l'acqua, aumentandone sensibilmente la concentrazione di Ossigeno (O₂).



Multi 5800
with Air Mix System
(optional)





Thanks to the NRG System
no mechanical parts
for controlling the impeller
direction are required.

PATENTED

high-tech line


Ceramic
shaft
(except
mod. 800-1300)



NRG
powered
(except
mod. 800-1300)

Threaded
intake/discharge
(except mod. 800)

Strong
case

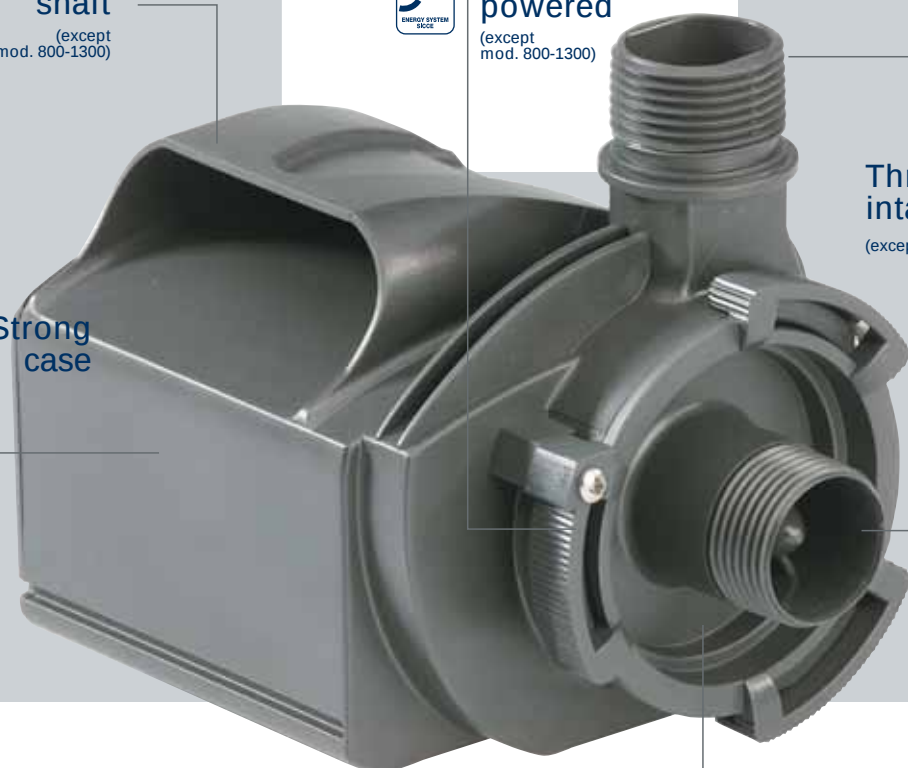

Wet & Dry
Application
(except mod. 800)

AQUARIUM



FOUNTAIN



POND






high-tech line

multi



Multi 800
Multi 1300
Multi 2500
Multi 4000
Multi 5800

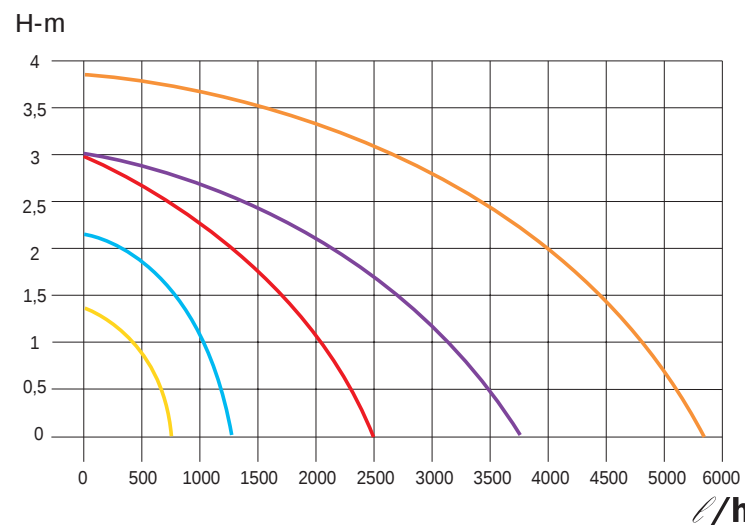



MULTI 800
1,5 m cable



MULTI 800
10 m cable



MULTI 1300
1,5 m cable



MULTI 1300
10 m cable




MULTI 2500 - 4000
1,5 m cable



MULTI 2500 - 4000
10 m cable



MULTI 5800
1,5 - 10 m cable

FLOW REGULATOR INCLUDED										
Included	 HOSE CONNECTOR	 LONG PRECHAMBER	 HOSE CONNECTOR AND SPONGE	 HOSE CONNECTOR	 LONG PRECHAMBER	 HOSE CONNECTOR	 HOSE CONNECTOR	 LONG PRECHAMBER	 HOSE CONNECTOR	 HOSE CONNECTOR
Optional							 AIR MIX PRECHAMBER	 AIR MIX PRECHAMBER	 AIR MIX PRECHAMBER	
Packaging										



Packaging dimensions



	Length	Depth	Height
Multi 800-1300 1,5 m cable	125 mm	122 mm	100 mm
Multi 800-1300 10 m cable	188 mm	120 mm	200 mm
Multi 2500-4000 1,5 m cable	188 mm	120 mm	150 mm
Multi 5800 1,5 m cable	188 mm	120 mm	150 mm
Multi 2500-4000-5800 10 m cable	188 mm	120 mm	150 mm




high-tech line

Aquarium application



Fountain application



Pond application



Multi 800 1300 2500 4000 5800

Tank capacity 60 - 200 l 150 - 300 l 200 - 600 l 400 - 1000 l 700 - 1400 l

Fountain height 0,4 - 1 m 0,6 - 1,5 m 1 - 2,5 m 1 - 2,5 m 1,5 - 3 m

Max pond size 1000 L 2000 L 3000 L 5000 L 8000 L

Multi_800

Volt 230 ~	Volt 120 ~
Hz 50	Hz 60
Watt 13	Watt 13,8
A 0,1	A 0,24
H-m 1.30	Feet 4.4
l/h 800	gph 220

Multi_1300

Volt 230 ~	Volt 120 ~
Hz 50	Hz 60
Watt 20	Watt 25
A 0,2	A 0,4
H-m 1.70	Feet 6.0
l/h 1200	gph 320

Multi_2500

Volt 230 ~	Volt 120 ~
Hz 50	Hz 60
Watt 55	Watt 40
A 0,51	A 0,66
H-m 3.10	Feet 10.5
l/h 2500	gph 715

Multi_4000

Volt 230 ~	Volt 120 ~
Hz 50	Hz 60
Watt 67	Watt 48
A 0,64	A 0,79
H-m 3.10	Feet 10.5
l/h 3800	gph 990

Multi_5800

Volt 230 ~	Volt 120 ~
Hz 50	Hz 60
Watt 90	Watt 142
A 0,8	A 2,97
H-m 3.80	Feet 12
l/h 5800	gph 1500




Models available in low voltage please contact us for specifications.


Also for
pool and spa
applications




multi 800

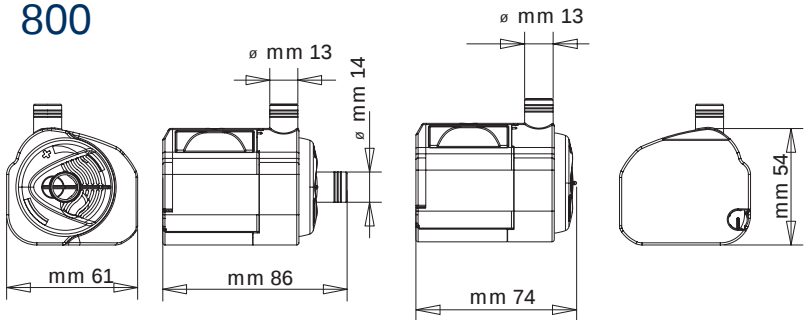


multi 1300

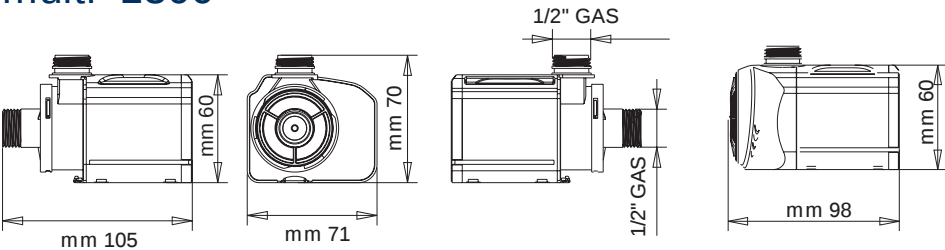

multi 2500 - 4000

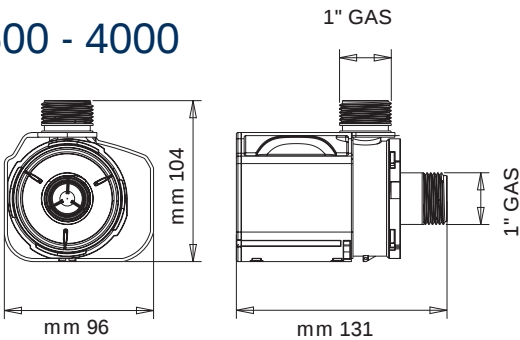

multi 5800

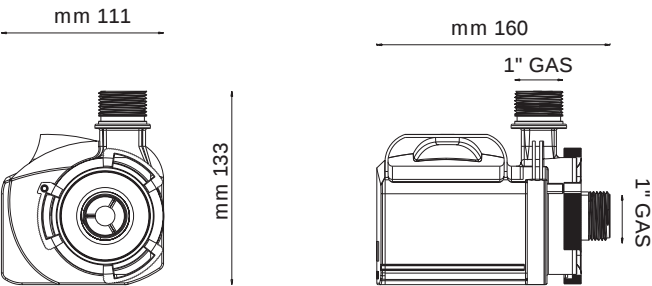

MULTI	APPLICATION	PLUS
800	 	 
1300	  	 
2500	  	 
4000	  	 
5800	  	 



Aquarium application



Pebble application



Fountain application



Pond application

: Accessories - Spare parts

Multi		800	1300	2500	4000	5800
Spare Parts						
ROTOR		90209 (230-240V) SGR0002 (120V)	SGR0003 (230-240V) SGR0004 (120V)	SGR0005 (230-240V) SGR0006 (120V)	SGR0005 (230-240V) SGR0006 (120V)	SGR0008 (230-240V) SGR0009 (120V)
CERAMIC SHAFT				SGR0007	SGR0007	SGR0010
SPONGE		SSP0003				
O-Rings		SKT0019	SKT0020	SKT0021	SKT0021	SKT0022
HOSE CONNECTOR		SPL0004	STR0001	STR0002	STR0002	STR0003
Accessories						
PRECHAMBER with flow regulator		SPL0003	SPL0007			
LONG PRECHAMBER		SPL0005 (+ sponge)	SPL0006	SPL0008	SPL0010	SPL0012
FLAT PRECHAMBER				SPL0009	SPL0011	
AIR MIX KIT with prechamber				SKT0031	SKT0032	SKT0033
WATER PLAYS KIT (Waterbell + Daisy)				SKT0030	SKT0030	SKT0030

WE RESERVE THE RIGHT TO MODIFY THE TECHNICAL DATA WITHOUT WARNING.

: SICCE S.p.A. - Via V. Emanuele, 115
36050 Pozzoleone (Vicenza) - ITALY
Tel: +39 0444 462826 Fax +39 0444 462828
www.sicce.com - info@sicce.com